


## 2D · 3D CAD DATA

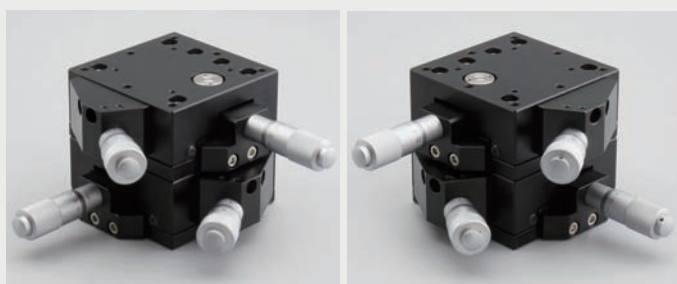

A20-60LR

| 规格SPEC |                              |                      |
|--------|------------------------------|----------------------|
| 型号     | A20-60RL                     | A20-60LR             |
| X轴型号   | A10-60R (参照P5-1~5-2)         | A10-60L (参照P5-1~5-2) |
| Y轴型号   | A10-60L (参照P5-1~5-2)         | A10-60R (参照P5-1~5-2) |
| 台面尺寸   | 60×60mm                      |                      |
| 行程     | 粗调: ±6.5mm 微调: ±0.3mm(X Y 共) |                      |
| 承重     | 5kaf(49N)                    |                      |

Technical drawing of the 4-20mA transmitter showing three views: front, top, and side. The front view shows a rectangular housing with a 4-M4 screw hole on the left and a 4-M3 screw hole on the right. The top view shows a square base with dimensions 47±6.5 and 60. The side view shows a rectangular profile with dimensions 60, 46, 16, 15, 2.5, and 50. The drawing includes various mounting and connection points, including a 4-M4 screw hole and a 4-M3 screw hole.

Technical drawing of the 4-Port 1/2" NPT Female Brass Tee Valve, showing three views: Top View, Side View, and Isometric View.

**Top View Dimensions:**

- Overall Width: 60
- Port Diameter: 11.5
- Mounting Hole Spacing (Top): 34, 33.5
- Mounting Hole Spacing (Side): 25, 32
- Port Diameter (Side): 25
- Mounting Hole Diameter (Side): 4-M3深6
- Port Diameter (Bottom): 25
- Mounting Hole Diameter (Bottom): 4-M3深6
- Port Diameter (Bottom): 25
- Mounting Hole Diameter (Bottom): 4-M3深6
- Port Diameter (Bottom): 25
- Mounting Hole Diameter (Bottom): 4-M3深6

**Side View Dimensions:**

- Overall Height: 60
- Base Width: 50
- Base Mounting Hole Spacing: 2.5, 15, 16
- Base Mounting Hole Diameter: 4-M4螺丝用孔

**Isometric View Dimensions:**

- Overall Height: 60
- Base Width: 50
- Base Mounting Hole Spacing: 2.5, 15, 16
- Base Mounting Hole Diameter: 4-M4螺丝用孔

8-24